

R2P3.5EXSA | R2P4.2EXSA

Asymmetric or Symmetric Column Configuration



- Flexible installation height 3867mm/4300mm(152 1/4" /169 5/16").
- With APS technology.
- Button control, easy and convenient.
- No additional spare parts are required, it can be installed symmetrically or asymmetrically, and the total height can also be adjusted.
- The arm locks engage and disengage automatically.
- Safety is double guaranteed both by mechanical latches and restrictive valves.
- Pre-fixed hydraulic pressure prevents overloading.
- Standard aluminum motor, no risks of overheating and longer service life.
- 24V safe control system.
- Vehicle roof protective device.
- Standard door protection pads to prevent possible damage to the door opened without caution.





Overall Size

Lifting capacity	3.5T/4.2T	
Structure Type	Asymmetric	Symmetric
Max. lifting height	1900mm	1900mm
Min height	95mm	95mm
Drive-through width	2545mm	2698mm
Lifting time	Approx. 35S	Approx. 35S
Motor	3.5kW/3ph	3.5kW/3ph
Electricity supply	According To Customer Needs	

OVERALL DIMENSION

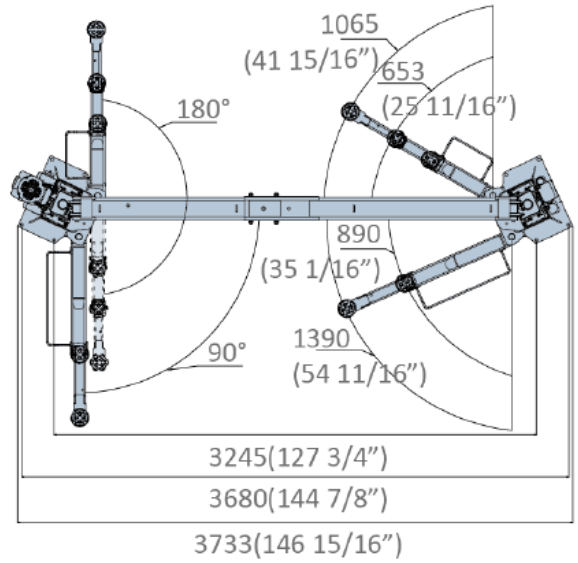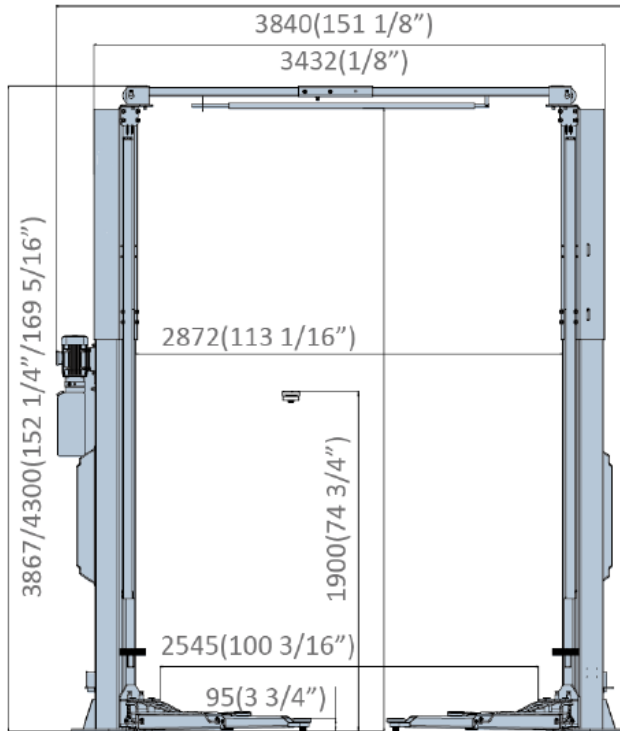

Asymmetric

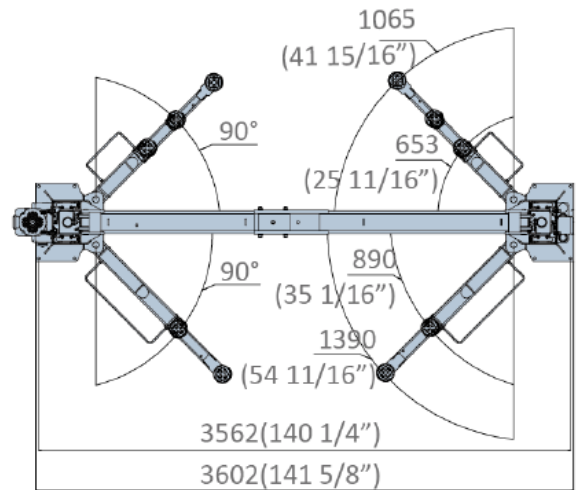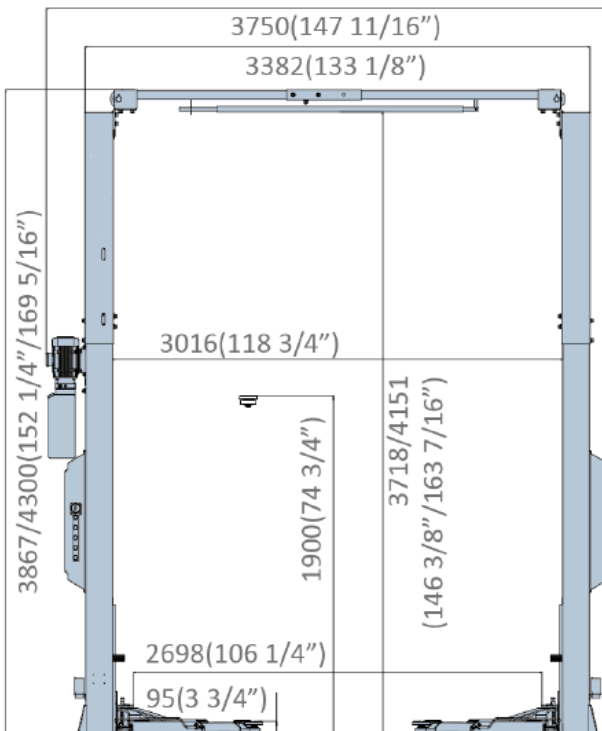

Symmetric

3-Stage Short Arm And 2-Stage
Long Arm (Symmetric)



Option
Square Pads for SUV

