



- 4500Kg (10,000 Lbs.) Lifting capacity
- 1900mm max. lifting height
- Adjustable Height 3600-3900mm
- Clear floor design
- Durable powder coat finish
- Single hand operation Electric push button for lowering and lock engagement
- Cylinder straight top device, run more smoothly
- The arm locks engage and disengage automatically
- Users' safety is double guaranteed by using both mechanical latches and restrictive valves
- Durable cylinders in each column with anti-surge valves
- Padded overhead safety shutoff bar for vehicle roof protection
- Standard door protection pads to prevent possible damage to the door
- Pre-fixed hydraulic pressure valve prevents overloading operation
- Standard column curtain
- 24V safe control system
- 3-stage short arm and 2-stage long arm





Designed and Engineered
IN THE USA

**ALSO AVAILABLE IN
RED & BLUE COLORS**



Model	Lifting Capacity	Max Lifting Height	Minimum Height	Overall Height	Lifting Time	Drive Through	Gross Weight	Motor
R2P4.5EXSe	4500Kg	1900mm	95mm-160mm	3600-3900mm	55 Sec	2728mm	859Kg	2.2 KW

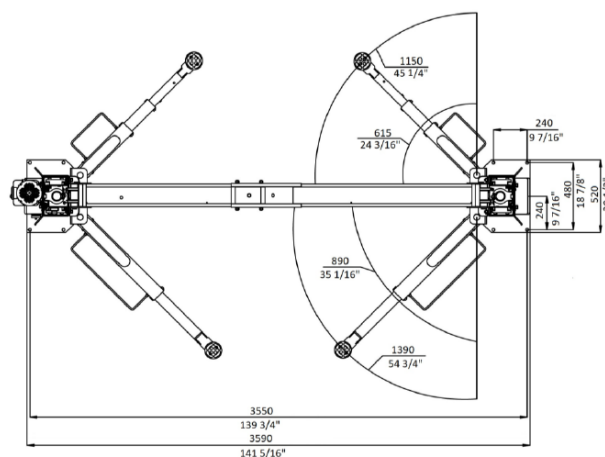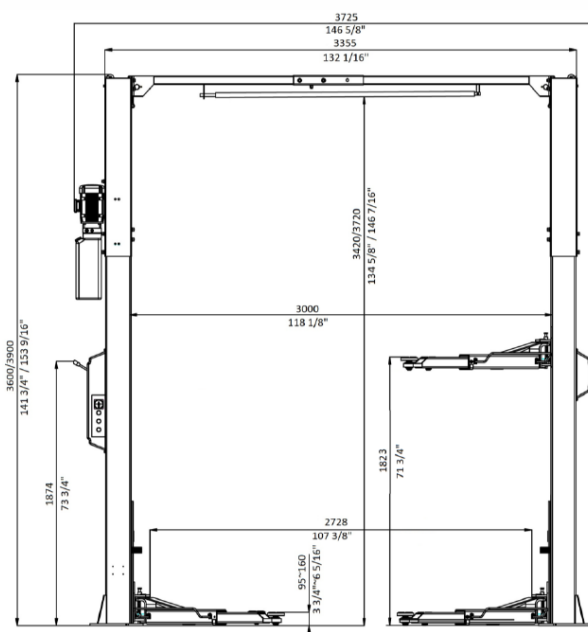

Handle for Release & Decent



3-Stage Short Arm
and 2-Stage Long Arm



Round Screw-up
Lifting Pad



Height Adapter



Pulley with
Derailment Protection



Designed and Engineered
IN THE USA