



- 5500kg (12,000 lbs.) lifting capacity
- 1900mm max. Lifting height
- Single side release for mechanical safety locking unit
- Cylinder straight top device, run more smoothly
- Durable cylinders in each column carry with anti-surge valves
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar
- Standard door protection pads to prevent possible damage to the door opened without caution
- Pre-fixed hydraulic pressure prevents overloading operation
- Clear floor design for easy movement of maintenance equipment under the raised vehicle
- 24V safe control system





Designed and Engineered
IN THE USA

**ALSO AVAILABLE IN
RED & BLUE COLORS**



Model	Lifting Capacity	Max Lifting Height	Minimum Height	Overall Height	Lifting Time	Drive Through	Gross Weight	Motor
R2P5.5EXS	5500Kg	1900mm	95mm-160mm	4451mm	55 Sec	3036mm	1010Kg	2.2Kw

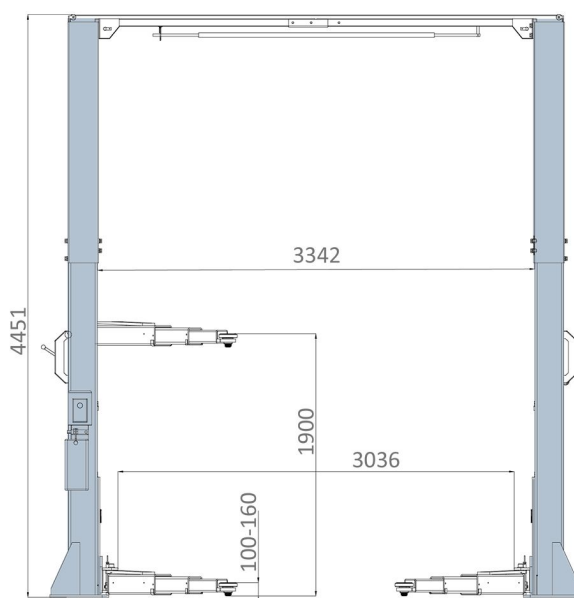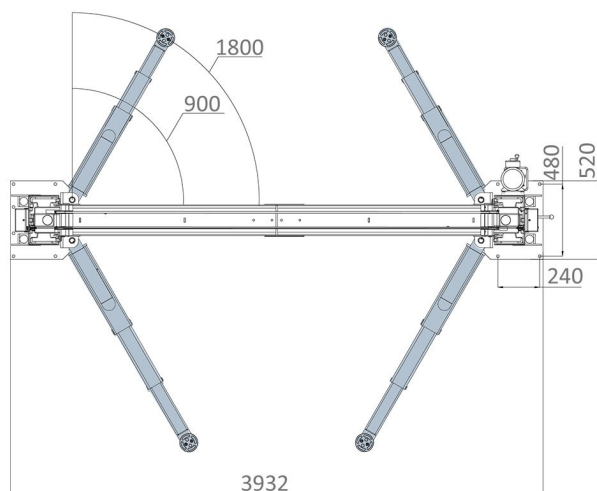

Mechanical Safety Lock



One-Side Safety Locks Release



Round Screw-up Lifting Pad



Height Adapter



Pulley with Derailment Protection




Designed and Engineered
IN THE USA