



- 6T Clear floor 2 post lift.
- 1900mm lifting height.
- Durable cylinders in each column carry with anti-surge valves.
- Screw-up lifting pads with clearance height less than 100mm.
- The arm locks engage and disengage automatically.
- 3- Stage flexible arms.
- Vehicle roof protective device.
- Standard aluminum motor avoids overheating and ensures long service life.
- Durable powder coating.
- Standard door protection pads to prevent possible damage when opening the doors. Standard column curtain.
- Pre-fixed hydraulic pressure prevents overloading operation.
- ABS control box with rubber gasket sealing.
- CE certificated.





Designed and Engineered  
IN THE USA

**ALSO AVAILABLE IN  
GRAY & BLUE COLORS**



| Model   | Lifting Capacity | Max Lifting Height | Minimum Height | Overall Height | Lifting Time | Drive Through | Gross Weight | Motor |
|---------|------------------|--------------------|----------------|----------------|--------------|---------------|--------------|-------|
| R2P6EXS | 6000Kg           | 1900mm             | 110m-160mm     | 4451-5051mm    | 45 sec       | 3342mm        | 1710Kg       | 4.0Kw |

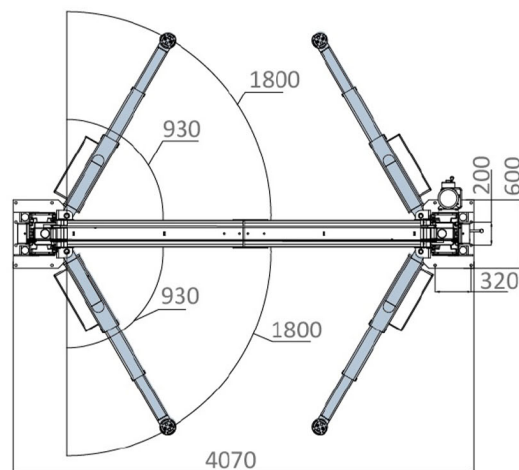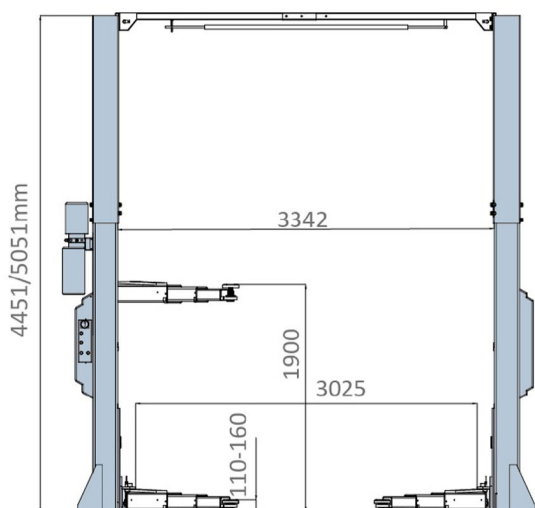

Mechanical Safety Lock



Electrical Release



Round Screw-up Lifting Pad



Height Adapter



Pulley with Derailment Protection



Designed and Engineered  
**IN THE USA**