



*Expedition
Series*

MODEL RLX4.2EXS/A

4.2T 9300LBS SCISSOR LIFT "S" SERVICE / 'A' ALIGNMENT



- 4.2T (9,300lbs) lifting capacity
- Long slip plate and adjustable turntable positions for alignment use
- Electrical or manual leveling
- In-ground installation or above-ground with optional drive-on ramps
- Long slip plate and adjustable turntable positions accommodate different kinds of wheelbases
- Pneumatic safety locking system
- Reserved tracks on platforms fit for optional rolling jacks (C Type)
- 24V safe control system
- Self-lubricated bushing and bearing
- Safety descent alarming buzzer
- Aluminum motor with fan on top to avoid overheating caused by long time working
- Aluminum Turn Plates
- Optional rolling jack
- Optional Wheel free jack
- ★ *Optional for Surface Mount: Drive-on Ramp and Oil Hose covers*




Designed and Engineered
IN THE USA

**ALSO AVAILABLE IN
RED & BLUE COLORS**



Model	Lifting Capacity	Max Lifting Height	Minimum Height	Lifting Time	Platform Width	Gross Weight	Motor
RLX4.2EXA	4200kg	2060mm	360mm	50 Sec	610mm	2840/3120Kg	5.0 HP
RLX4.2EXS	4200kg	2060mm	360mm	50 Sec	610mm	2840/3120Kg	5.0 HP

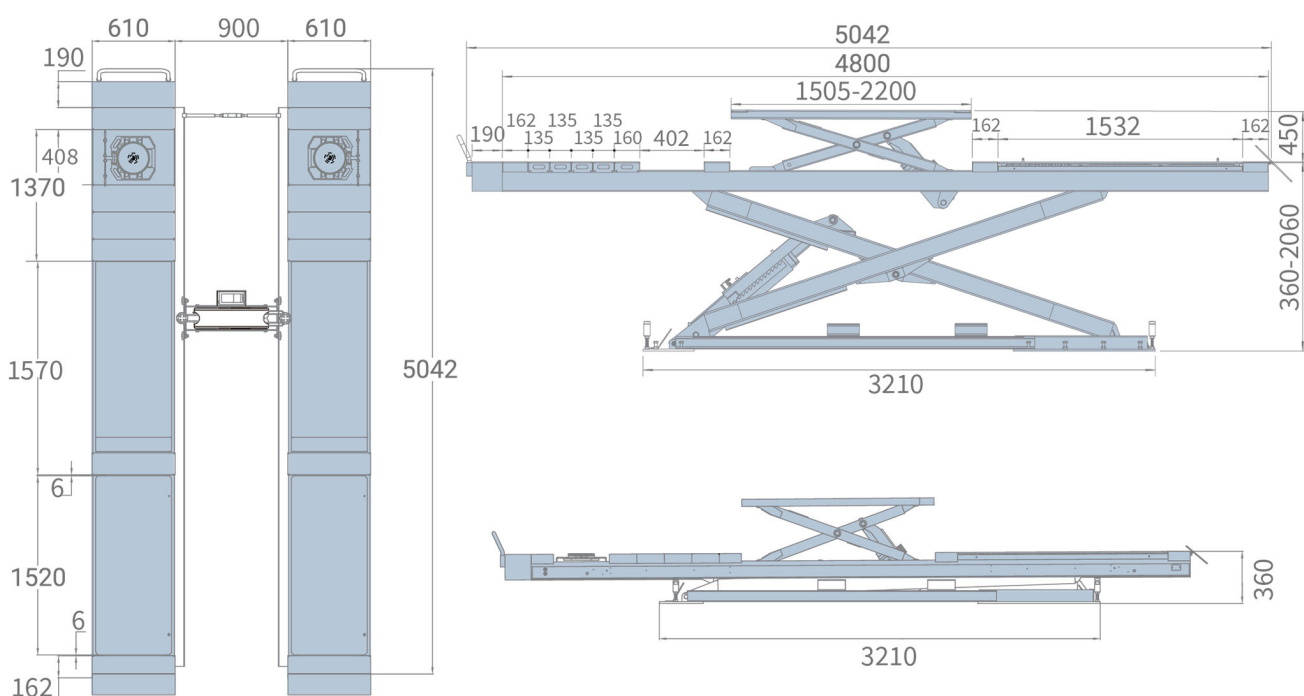


Pneumatic Release System



Slip Plate



Mechanical Lock

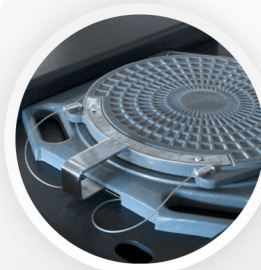


Turn Plate


OPTIONAL



Rolling Jack 3000Kg



Wheel Free Jack



Ramp for Surface Mount



Designed and Engineered
IN THE USA