



- 8000LBS. (3.5T) lifting capacity
- Ultra-thin design with a height of only 105mm for easy and quick installation
- Above-ground or in-ground installation
- 4 5/16" initial height
- Four cylinder design
- Pneumatic released safety locking system
- Drive-on ramps lock into position as platform extensions
- Steady raising and lowering, no noise when lowered to ground
- Durable cylinders with anti-surge valves
- 24V safe control system
- Height limit switch
- Powder coated finish
- Self-lubricated bushing and bearing
- Aluminum motor with fan on top to avoid overheating caused by long time working




Designed and Engineered
IN THE USA

**ALSO AVAILABLE IN
RED & BLUE COLORS**



Model	Lifting Capacity	Max Lifting Height	Min Height	Lifting Time	Air Supply	Capacity of Motor	Platform Width	Gross Weight	Electricity Supply
RSXL-8EXS	3500KG	2000mm	105mm	45sec	6-8bar	3.5KW	635mm	907 Kg	According To Customer Needs

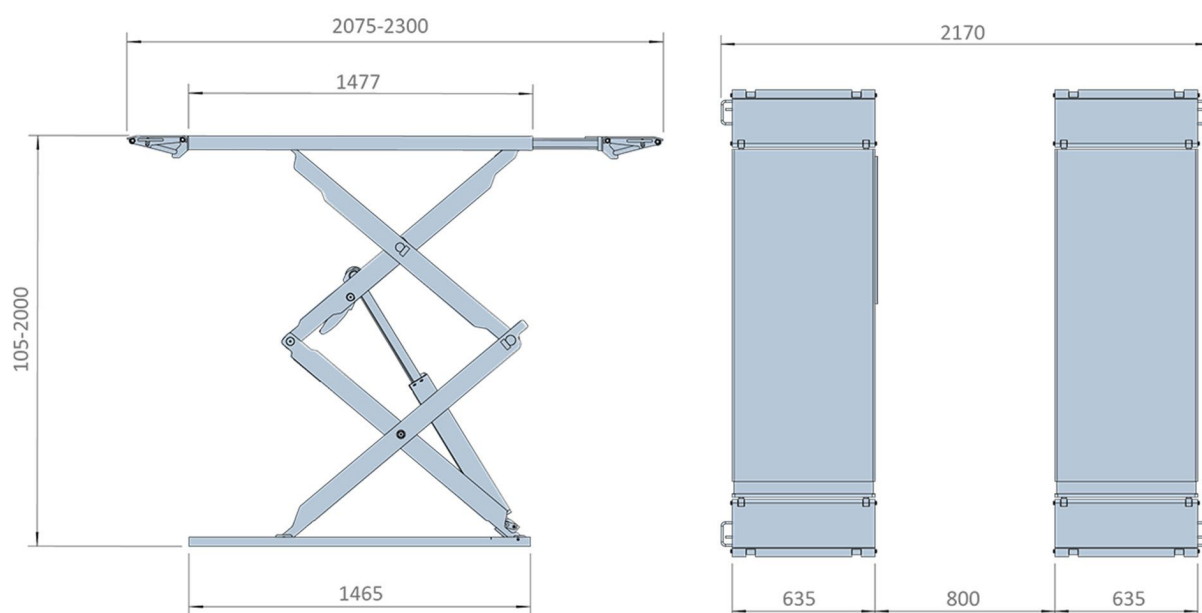

Height limit Switch



High Quality Ball Valve



Drive-on Ramp &
Platform Extension



Mechanical Safety Lock



24v Safe Control System



Designed and Engineered
IN THE USA