



- 4000kg, suitable for most sedans, heavy-duty SUVs, pickup trucks and vans.
- Platform Length, extend-able from 1675 mm to 2300 mm, fits both short-wheelbase compact cars and long-wheelbase passenger vans
- Minimum height adjustable (270-330mm) to match existing pit floors
- Four-Cylinder Drive for enhanced stability and synchronized lifting.
- One-button Auto-Leveling. Simple and Efficient.
- Mechanical latch prevents uncontrolled descent at raised positions. Pneumatic release for stable performance at low maintenance cost.
- Out-of-level photoelectric sensor guards against risks of non-synchronization due to blockage or leakage.
- Anti-burst hydraulic valve ensures descent at safe speed in the event of accidental leakage.
- Low-position stop and audible alarm for the final travel below the stop position.
- Aluminum Shell Motor: Rapid dissipation, consistent efficiency.
- 24V Safe Control System and a sealed ABS enclosure to prevent electric shock, moisture damage, and electrical leakage.
- Greaseable bearings at all pivot points for extended service life and sustained stability.





Designed and Engineered
IN THE USA

**ALSO AVAILABLE IN
RED & BLUE COLORS**



Model	Lifting Capacity	Max Lifting Height	Minimum Height	Air Supply	Lifting Time	Platform Width	Gross Weight	Model
RX9EXSD	4000Kg	2140mm	270mm	6-8 Bar	45 Sec	565mm	690/750Kg	3.5 KW

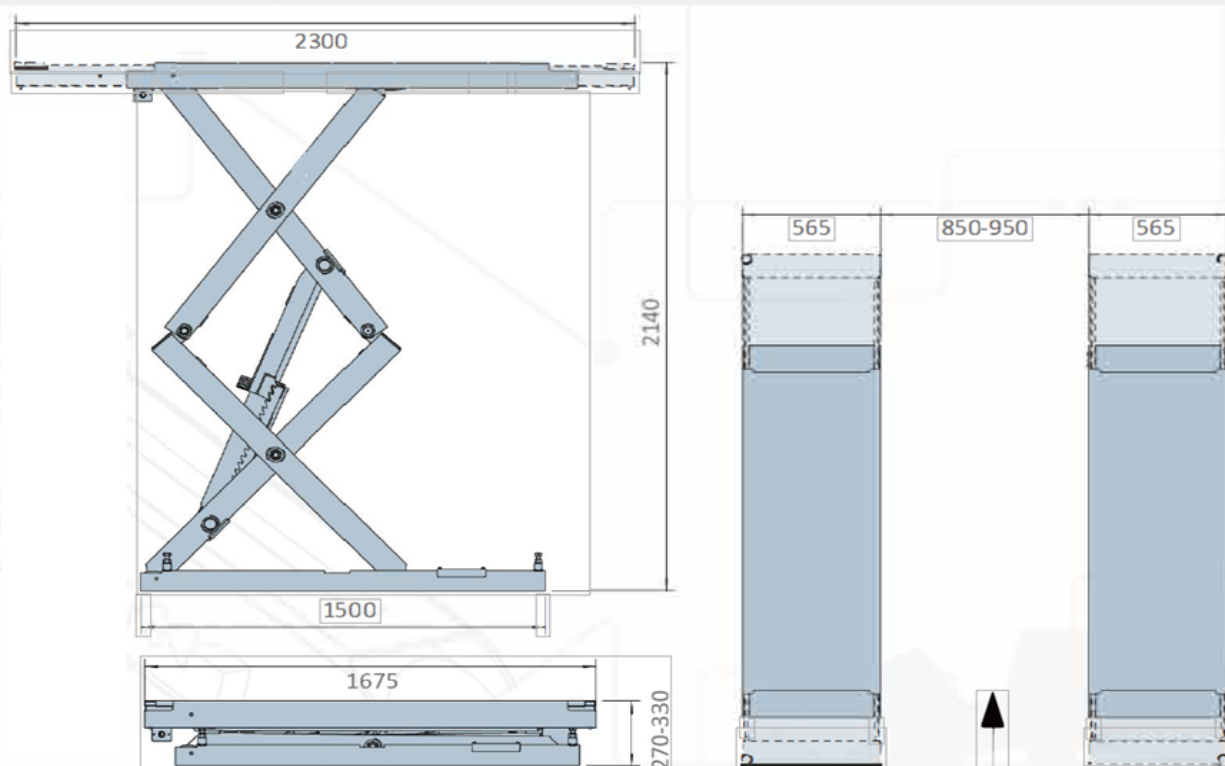

Pneumatic Release
Mechanic Lock



Cylinder Support



Height Limit Switch



Height Adapter



Designed and Engineered
IN THE USA